

ZT-1630

ZERO-TURN SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM



THE ULTIMATE COMPACT LIFT WITH PRECISION MANEUVERABILITY...

STANDARD FEATURES

- ▶ Proportional controls
- ▶ Electric drive & steer
- ▶ 110V-AC power-to-platform
- ▶ USB ports
- ▶ Horn
- ▶ Maintenance charger
- ▶ Total Control Drive System
- ▶ Hour meter
- ▶ Manual descent pull cable
- ▶ Active tilt alarm
- ▶ Active load-sensing
- ▶ Low floor load pressures
- ▶ Pothole protection
- ▶ Forklift pockets
- ▶ Zero-turn radius
- ▶ EZ-Glide slide out
- ▶ 25% gradeability
- ▶ Solid rubber, non-marking wheels
- ▶ Lanyard attach points
- ▶ No folding rails
- ▶ Locking front wheel casters
- ▶ Removable platform controls
- ▶ Cantilever gate
- ▶ 2-year parts & labor warranty
- ▶ 5-year structural warranty

OPTIONS

- ▶ Flashing beacon
- ▶ Inverter
- ▶ All motion alarm

STANDARDS COMPLIANCE

- ▶ ANSI A92.20
- ▶ CSA B354.6:17

 **PROUDLY MADE
IN THE USA**

HY-BRID LIFTS™
BY CUSTOM EQUIPMENT LLC

ZT-1630

ZERO-TURN SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

SPECIFICATIONS




A	Working Height (1 Person Indoor)	22 ft	6.7 m
B	Platform Height Maximum (1 Person Indoor)	16 ft	4.9 m
C	Platform Height Minimum	24 in	61 cm
D	Ground Clearance Elevated	0.5 in	1.3 cm
E	Ground Clearance Lowered	3.6 in	9.1 cm
F	Overall Length w/ Step	62 in	157.5 cm
G	Overall Width	30 in	76.2 cm
H	Stowed Height	68 in	172.7 cm
I	Platform Length	53 in	134.6 cm
J	Platform Width	24 in	61 cm
K	Slide Out Extension Deck Length	30 in	76.2 cm
	Tires (Front/Rear)	8/12 in	20.3/30.5 cm

PERFORMANCE

Rated Occupancy (Indoor)	1 Person	
Platform Capacity	650 lbs	294.8 kg
Slide Out Extension Deck Capacity	250 lbs	113.4 kg
Gradeability	25%	
Inside Turn Radius	Zero	
Drive Speed Elevated (Proportional)	0.9 mph	0.4 m/s
Drive Speed Lowered (Proportional)	2.7 mph	1.2 m/s
Lift Speed (Up/Down)	18/18 sec	
Power Source	24V DC	

FLOOR LOADING

Weight	1785 lbs	809.7 kg
Wheel Load at Minimum Capacity	143.9 psi	992.1 kPa
Wheel Load at 500 lbs Capacity	174.4 psi	1202.4 kPa
Wheel Load at Maximum Capacity	186 psi	1282.4 kPa

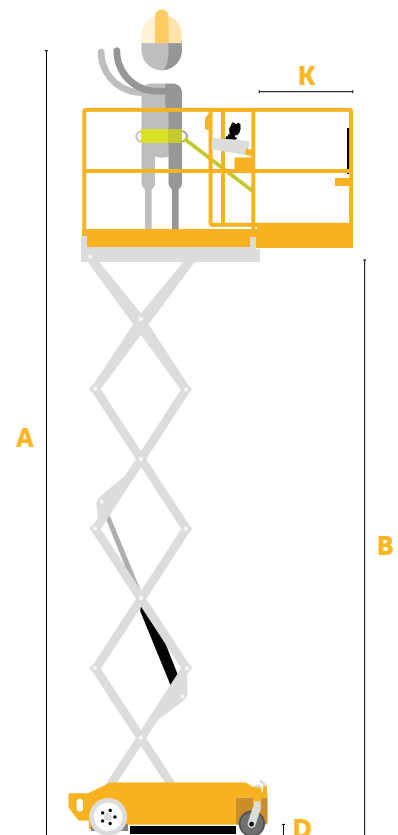

This brochure is for illustrative purposes only and based on the latest information available at the time of printing. Hy-Brid Lifts™ reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Hy-Brid Lifts™ is a trademark of Custom Equipment LLC. ©2021 Custom Equipment LLC. All rights reserved.
08|20 Part No. ZT-0002

HY-BRID LIFTS™
BY CUSTOM EQUIPMENT LLC